

Observation and Analysis of Particle Image Velocimetry

Introduction

The purpose of the work and research I conducted during SURF 2014 program was to evaluate the capability of the THERMOFLOW[™] and FLOWCOACH[™] setups and the associated FLOWEX[™] software recently acquired by the Mechanical Engineering Department at UNH.

The experimental setups enabled the visualization and analysis of fluid flows over various objects subjected for testing. This measurement technique is known as Particle Imaging Velocimetry (PIV) and is a useful tool to investigate complex flows, for instance, those which arise in models of artificial organs, MEMS devices, over wind turbines and many other applications.

Methodology

The methods used during this research consisted of mapping out the quality of measurements obtained from the PIV setups dependent on geometry and patterns of the testing features. This was done by seeding the test fluid with very small neutrally buoyant particles known as microspheres and tracking their displacement with cameras and lighting. The samples tested in the FLOWCOACH[™] were printed out of ABS plastic using the uPrint® 3-D printer; dimensional accuracy was measured using the Galileo[™] AV metrology system – both of which are accessible in Buckman 225. For the THERMOFLOW[™] setup, samples must be made of a heat resistant material and as such will be CNC machined at the Mechanical Engineering Machine Shop.


PIV Process – Excerpt of Developed Manual Camera Setup Software Record Setup • Choose USB • Make all • Run • Boot up FLOWEX or PIV apparatus. necessary software. connections camera. • Tailor • Set up • Adjust camera General, PIV, apparatus, settings and camera settings to computer, and PIV frame rate. and clear image parameters Record network. according to • Adjust video. • Add machine frame rate • View seeding used and *dt* preview. medium to settings. fluid.

Ethan Makuck, Mechanical Engineering, Junior Maria-Isabel Carnasciali, Ph.D., Assistant Professor, Mechanical Engineering

Analyze PIV • Adjust parameters: • Pre-Process • PIV Parameter • Post-Process • View PIV results and data.

Results

Seen below are sample results of the PIV process after multiple trials of parameter adjustments needed to tailor the calculations to the unique geometry, fluid properties, lighting conditions, and camera settings chosen for FLOWCOACHTM testing. Vector Fields with corresponding Velocity vs. Frame graphs were produced.

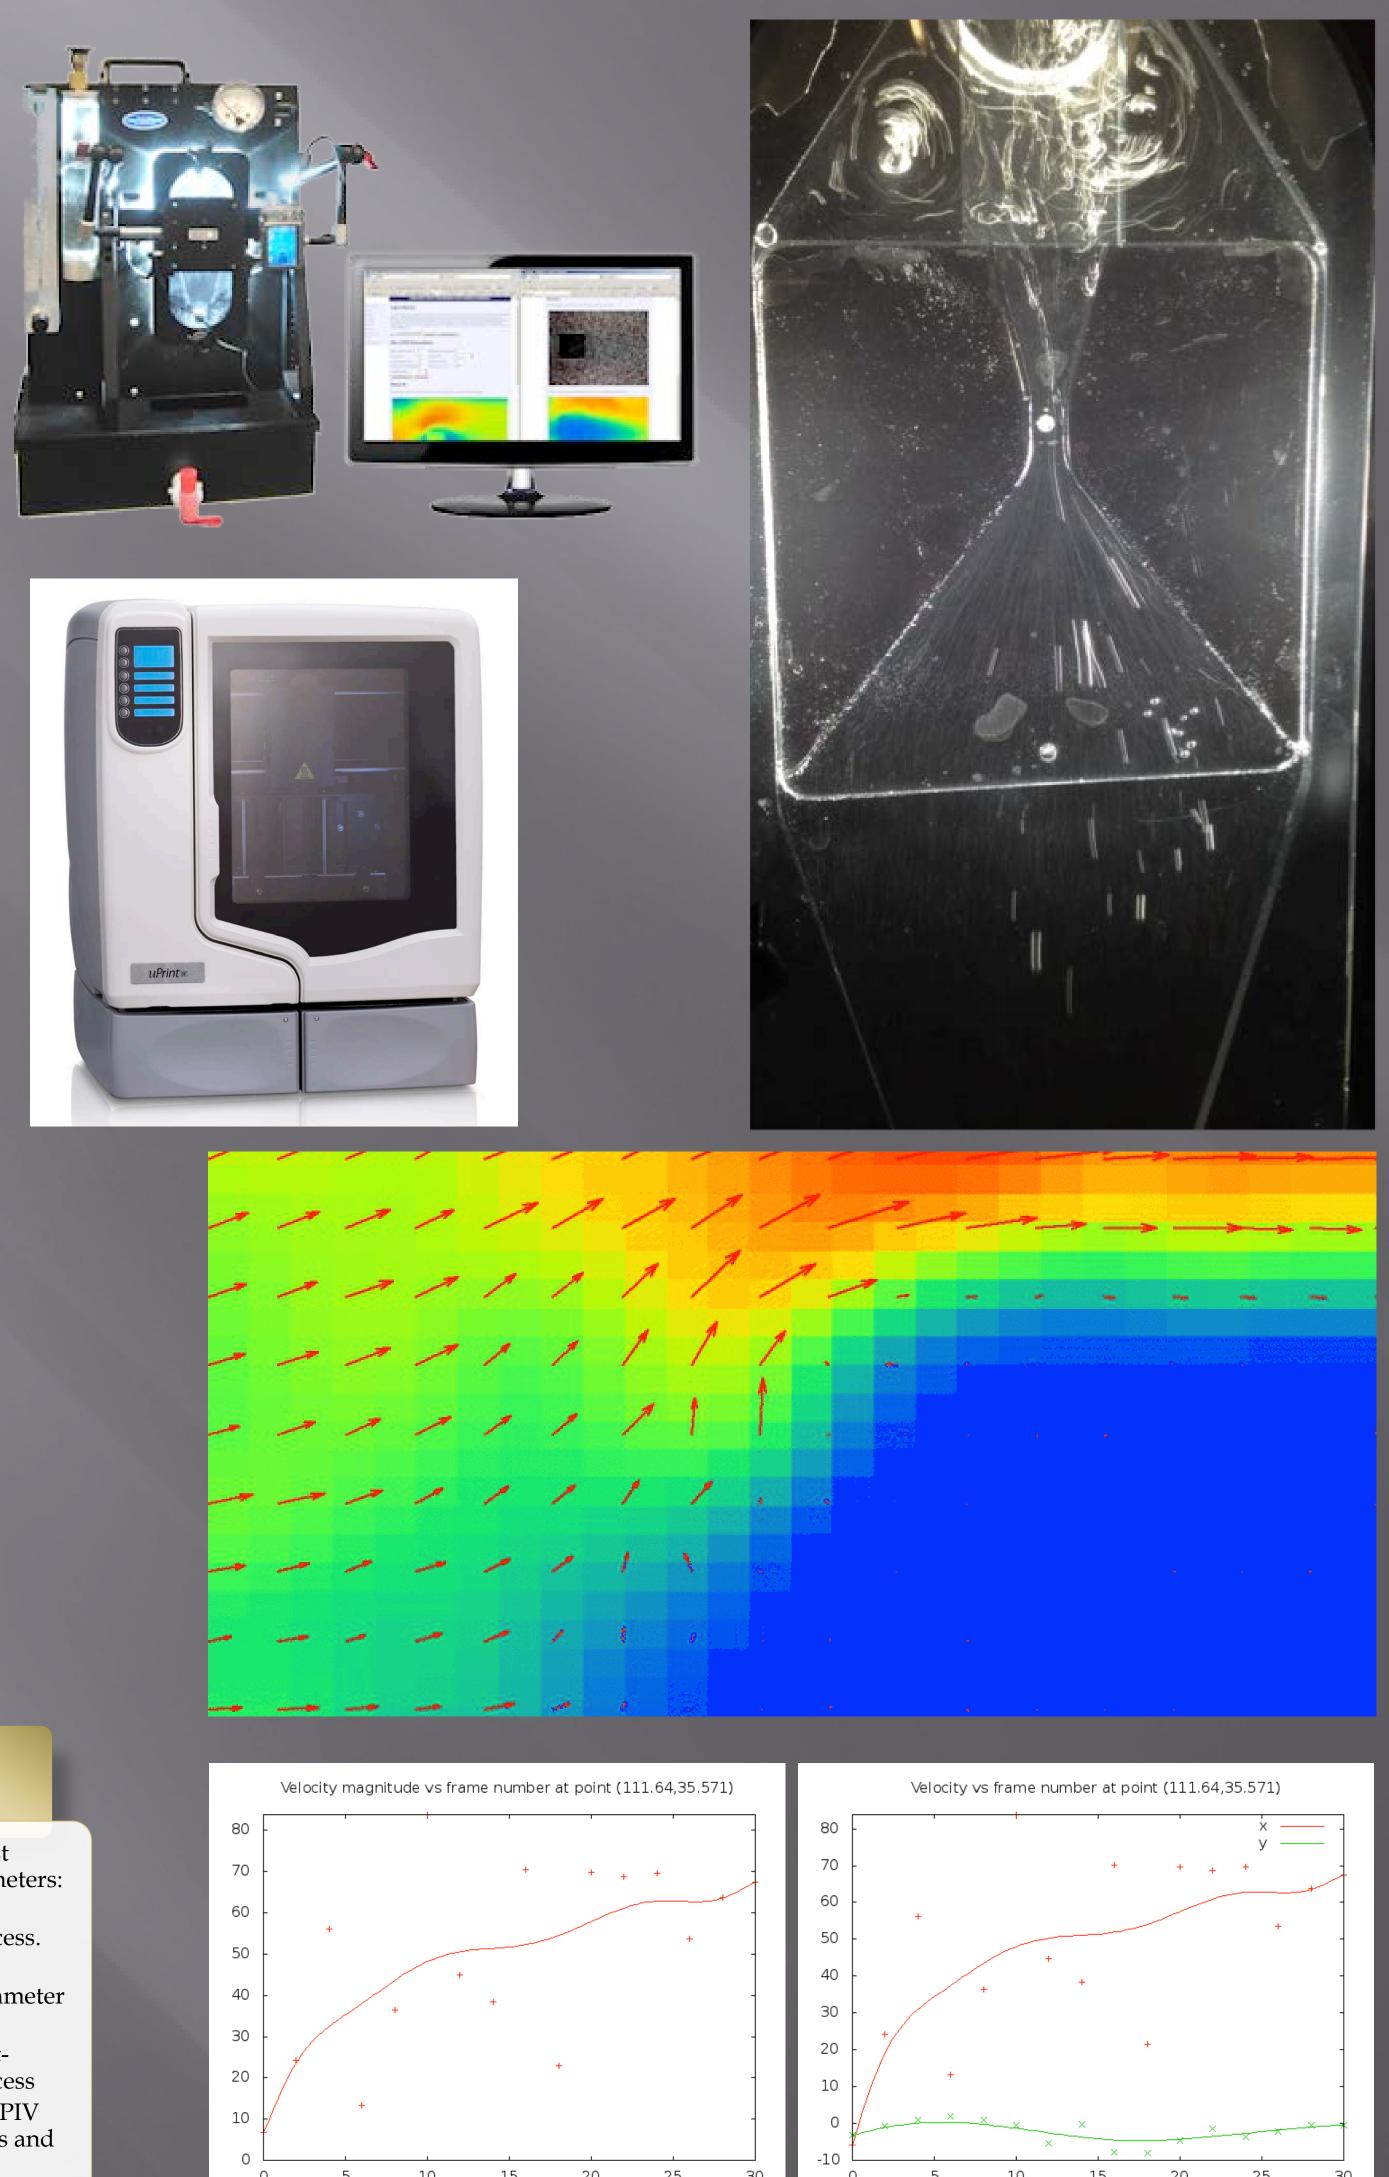

Summer Undergraduate Research Fellowship

Conclusions

It became clear during research that it was critical to apply the correct settings in both the software and camera parameters to obtain consistent and accurate results. Much of the research consisted of running tests changing one parameter at a time to see the deviation in results computed by the PIV software. The capabilities of the equipment and software used were seen to the extent the SURF time frame allowed for.

Future Work

There is the potential for continuation of the research. Various samples will be designed and built using the same processes to gain further data. Other elements will be added as well, including the addition of heat to the flow inserts in the THERMOFLOWTM device. The use of lasers and strobes synchronized with the camera will also be an added feature. Finally, a brief instructional operator's manual will be created for the setup of the equipment and provided to future users in laboratory or classroom environment.

Literature Cited

• Interactive Flow Studies. "THERMOFLOW Heat Transfer and Fluid Mechanics." Interactive Flow Studies Corporation, 2012. 1-6. Print.

• *IFS – Interactive Flow Studies*. Interactive Flow Studies Corporation, 2014. Web. 4. March 2014. <http://www.interactiveflows.com/>

Acknowledgments:

Dr. Maria-Isabel Carnasciali

- **Richard Cerniglia**
- John Kelley
- Dr. Okcay Murat
- Arda Saygili, MSIE Student

